

# WATER RESISTANT PARGING MIX


September, 09 Page 1 of 2

## PRODUCT

TARGET® Water Resistant Parging Mix consists of accurately weighed Portland cement, specially graded fine aggregates and admixtures designed to enhance workability.

## USES

Designed for parging concrete blocks or poured concrete to level fill imperfections up to  $\frac{3}{8}$ " deep. Can be used above or below grade.

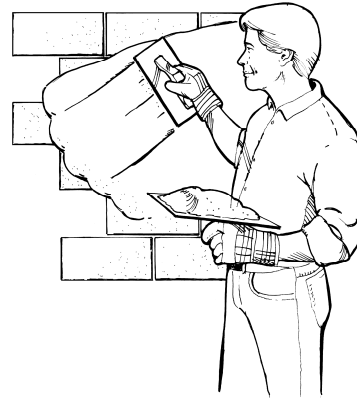

## DIRECTIONS

### 1. SURFACE PREPARATION

Surfaces must be structurally sound. Remove all sand, dirt, dust, paint, etc. by brushing vigorously with a broom or stiff brush and water. If small amounts of oil or grease are present, scrub vigorously with a strong detergent solution and rinse thoroughly with water to remove all detergent residue.

Use clean water to thoroughly saturate the area to be parged. Remove any free standing water. Very porous concrete may require several applications of water to ensure complete saturation.

### 2. MIXING

Empty contents of bag into a clean mixing container. Add 5 litres (1.3 US gallon) of clean water per 30 kg bag and mix thoroughly. Add up to  $\frac{1}{4}$  litre ( $\frac{1}{2}$  pint) of water if necessary to adjust the consistency of the mix. Avoid using too much water.

### 3. APPLICATION AND FINISHING

Using a trowel, apply not more than  $\frac{3}{8}$  inch thick. Finish to the required surface texture using normal concrete or plaster finishing procedures.

### 4. CURING

After final set, keep damp for 72 hours by misting occasionally with water. Protect from freezing for at least 72 hours.

**LIMITATIONS:** Do not install TARGET Water Resistant Parging Mix when temperature is below 5°C (41°F) or above 30°C (86°F).

## COVERAGE

Each 30 kg (66 lb) bag of TARGET Water Resistant Parging Mix will cover approximately 4.6 m<sup>2</sup> (50 ft<sup>2</sup>) at 3 mm ( $\frac{1}{8}$  inch) thickness.

## STORAGE

Store in a dry place. Keep out of reach of children.

Product performance is affected by many factors, including storage, method and conditions of application and use. User testing is ESSENTIAL to determine suitability of product for intended method of application and use. Target's SOLE WARRANTY is that the product has been manufactured to specifications. No oral or written information or advice shall increase this warranty or create new warranties. Target's SOLE LIABILITY is to replace product proved defective. In no event shall Target be liable for any consequential, indirect or other damages whether arising from negligence or otherwise.

TARGET is a registered trade-mark of Quikrete Canada Holdings Limited. Target Products Ltd. is an authorized licensee.



T  
A  
R  
G  
E  
T  
  
P  
R  
O  
D  
U  
C  
T  
S  
  
L  
T  
D

# WATER RESISTANT PARGING MIX

September, 09 Page 2 of 2

## CAUTION

When mixed with water, the cement in this product forms a caustic solution of calcium hydroxide. Avoid contact with eyes. Avoid ingestion or inhalation. Wear appropriate clothing when working with Parging Mix and avoid contact with skin, or with wet clothing.

**First Aid Treatment:** If splashed in eyes or on skin, flush thoroughly with water. Obtain Medical advice if irritation persists.

T  
A  
R  
G  
E  
T  
  
P  
R  
O  
D  
U  
C  
T  
S  
  
L  
T  
D

Product performance is affected by many factors, including storage, method and conditions of application and use. User testing is ESSENTIAL to determine suitability of product for intended method of application and use. Target's SOLE WARRANTY is that the product has been manufactured to specifications. No oral or written information or advice shall increase this warranty or create new warranties. Target's SOLE LIABILITY is to replace product proved defective. In no event shall Target be liable for any consequential, indirect or other damages whether arising from negligence or otherwise.

TARGET is a registered trade-mark of Quikrete Canada Holdings Limited. Target Products Ltd. is an authorized licensee.

