


# PSI 6000

September, 09 Page 1 of 2

## PRODUCT

QUIKRETE® PSI 6000 is a premixed concrete mix containing accurately weighed portland cement, admixtures and specially graded coarse and fine aggregates. When mixed with water and placed in accordance with directions, QUIKRETE PSI 6000 results in a concrete with rapid initial strength gain and high final strength. The mix is air-entrained to provide superior durability in situations where the concrete will be exposed to cycles of freezing and thawing.

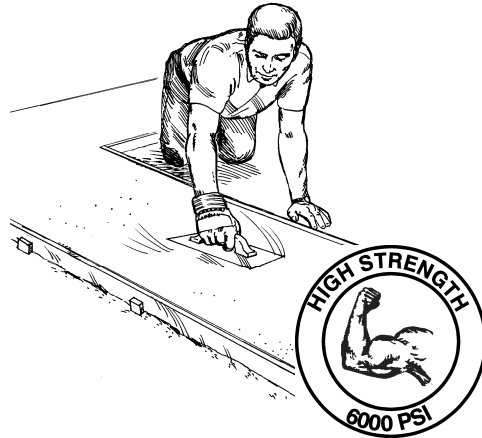

## USES

QUIKRETE PSI 6000 Concrete Mix is suitable for projects requiring normal setting time with rapid strength development after final set has occurred, or where a high final strength is needed. Typical applications include sidewalks, slabs, steps, patios, deck supports, curbs, patching existing concrete.

## TYPICAL PROPERTIES

When mixed with sufficient water to give an easily placed and trowelable mix (about 75 mm or 3 inch slump), QUIKRETE PSI 6000 remains workable for up to two hours and sets in about five hours at 15 to 20°C (60 to 68°F).

The rapid strength gain of the product usually permits opening of new concrete to foot traffic in about 8 hours. Typical compressive strengths are:

After 24 hours	2000 psi (13.8 MPa)
After 7 days	4000 psi (27.6 MPa)
After 28 days	6000 psi (41.4 MPa)

## INSTRUCTIONS FOR MIXING

Detailed mixing instructions are printed on each PSI 6000 bag.

Product performance is affected by many factors, including storage, method and conditions of application and use. User testing is ESSENTIAL to determine suitability of product for intended method of application and use. Target's SOLE WARRANTY is that the product has been manufactured to specifications. No oral or written information or advice shall increase this warranty or create new warranties. Target's SOLE LIABILITY is to replace product proved defective. In no event shall Target be liable for any consequential, indirect or other damages whether arising from negligence or otherwise.

TARGET is a registered trade-mark of Quikrete Canada Holdings Limited. Target Products Ltd. is an authorized licensee.



T  
A  
R  
G  
E  
T  
  
P  
R  
O  
D  
U  
C  
T  
S  
  
L  
T  
D

# PSI 6000

## COVERAGE

When mixed as directed, each 25 kg bag of QUIKRETE PSI 6000 yields approximately 0.43 cu.ft. of concrete.

For estimating purposes, the following quantities may be used:

**1 cubic foot** - 2.3 bags      **1 cubic yard** - 63 bags      **1 cubic meter** - 82 bags

A table showing the approximate number of QUIKRETE PSI 6000 Concrete Mix bags required for various areas and thicknesses is provided on the product bag.



Product performance is affected by many factors, including storage, method and conditions of application and use. User testing is ESSENTIAL to determine suitability of product for intended method of application and use. Target's SOLE WARRANTY is that the product has been manufactured to specifications. No oral or written information or advice shall increase this warranty or create new warranties. Target's SOLE LIABILITY is to replace product proved defective. In no event shall Target be liable for any consequential, indirect or other damages whether arising from negligence or otherwise.

TARGET is a registered trade-mark of Quikrete Canada Holdings Limited. Target Products Ltd. is an authorized licensee.

