


QUIKRETE

TOTAL PROGRAM

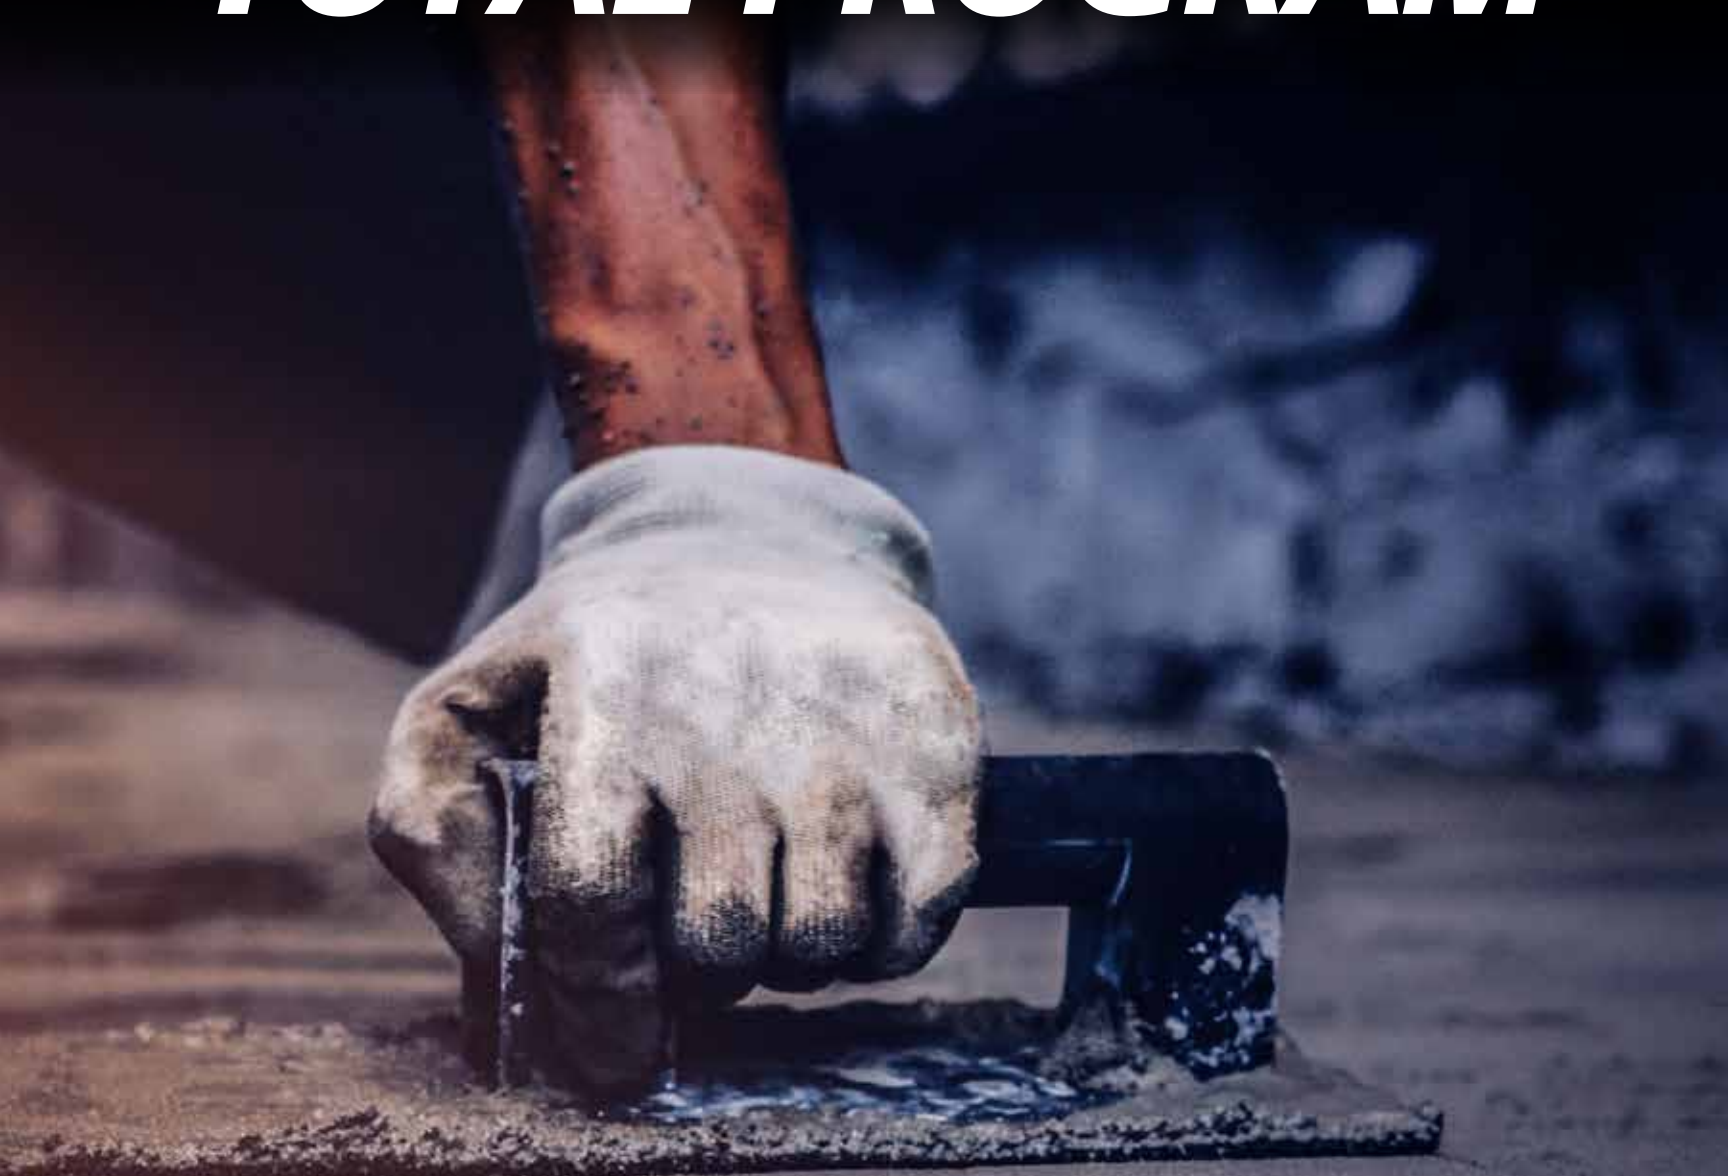

QUIKRETE
CEMENT & CONCRETE PRODUCTS™

PRODUCT GUIDE

www.targetproducts.com



**PRODUCTS THAT LAST...
COME FROM COMPANIES
THAT DO.**

QUALITY.
CONSISTENCY.
PERFORMANCE.


Table of Contents

CONCRETE MIXES2	HARDSCAPES EARTH ESSENTIALS Continued10
CONCRETE MIX2	PLAY SAND10
POST HASTE® CONCRETE MIX2	BEACH PEBBLES10
FAST-SETTING CONCRETE MIX2	DRAINAGE GRAVEL10
PSI 60002		
COUNTERTOP MIX3	MISCELLANEOUS PRODUCTS11
STACK & BANK3	QUIKTUBES BUILDING FORMS11
		LIQUID CEMENT COLOUR11
GROUTS & MASONRY PRODUCTS3	BACKER ROD11
PORTLAND EXPANDING GROUT3	EXPANSION JOINT11
FASTSET™ ALL-CRETE™ NON-SHRINK GROUT3	ACRYLIC FORTIFIER12
FASTSET™ REPAIR MORTAR4	CONCRETE & ASPHALT CLEANER - CONCENTRATE12
MASON MIX (TYPE S MORTAR)4	ACRYLIC CONCRETE CURE & SEAL12
WATER RESISTANT PARGING MIX4		
QUIKWALL SURFACE BONDING CEMENT4	REPAIR PRODUCTS – PATCHING PRODUCTS13
		BONDED TOPPING MIX13
CEMENT & LIME PRODUCTS5	HYDRAULIC WATERSTOP CEMENT13
GENERAL USE CEMENT5	ANCHORING CEMENT13
MCS (MORTAR S) CEMENT5	QUICK-SETTING CEMENT13
HE (TYPE 30) PORTLAND CEMENT5	CONCRETE BONDING ADHESIVE14
HS (TYPE 50) PORTLAND CEMENT5	CONCRETE PATCHING COMPOUND14
WHITE PORTLAND CEMENT FEDERAL WHITE6	ZIP AND MIX REPAIR MORTAR14
PORTLAND LIME CEMENT BLEND6	PRE-MIXED STUCCO PATCH14
HYDRATED LIME - TYPE 'S'6	EXTERIOR STUCCO PATCH15
HYDRATED LIME - TYPE 'N'6		
		REPAIR PRODUCTS – JOINT AND CRACK REPAIR15
REPAIR PRODUCTS - BAGS7	GREY CONCRETE CRACK SEALER15
SAND / TOPPING7	CONCRETE REPAIR15
BONDED TOPPING MIX7	STUCCO CRACK REPAIR15
RE-CAP CONCRETE RESURFACER7	MORTAR REPAIR16
FAST-SET SELF-LEVELING FLOOR RESURFACER7	POLYURETHANE MORTAR JOINT SEALANT16
BLACKTOP PATCH8	POLYURETHANE SEALANT GRAY – SELF LEVELLING16
		POLYURETHANE SEALANT – NON-SAG17
SANDS AND AGGREGATE PRODUCTS8	FAST SET™ ANCHORING EPOXY17
PREMIUM PLAY SAND8	COMMERCIAL GRADE POLYURETHANE ADHESIVE17
ALL PURPOSE GRAVEL8		
BASE ROCK8	WATERPROOFING PRODUCTS18
PATIO PAVER JOINTING SAND9	XYPEX HIGH 'N DRY18
TRACTION SAND9	XYPEX PATCH 'N PLUG18
SILICA ABRASIVE 30-50,16-30, 12-40, 12-50, 20-409		
1/4 DOWN - LIMESTONE9	HIGH PERFORMANCE CEMENT PRODUCTS19
		HPC FASTSET CONCRETE MIX20
HARDSCAPES - EARTH ESSENTIALS10	HPC FASTSET ALL-CRETE20
POLYMERIC JOINTING SAND10	HPC FASTSET REPAIR MORTAR20
LIMESTONE SCREENINGS10	HPC FASTSET SELF-LEVELING FLOOR RESURFACER20
PEA GRAVEL10		
WHITE ROCK10	CONCRETE MIX SELECTOR GUIDE21

QUIKRETE® HOW-TO PROJECT VIDEO GALLERY

REACHING YOUR CUSTOMER

A survey by the Home Projects Council, a collection of reputable home improvement experts, identified how-to videos as the leading resource for home improvement project education and instruction. Understanding that trend, The QUIKRETE® Company has established a how-to video gallery to inspire project ideas and instill project confidence.

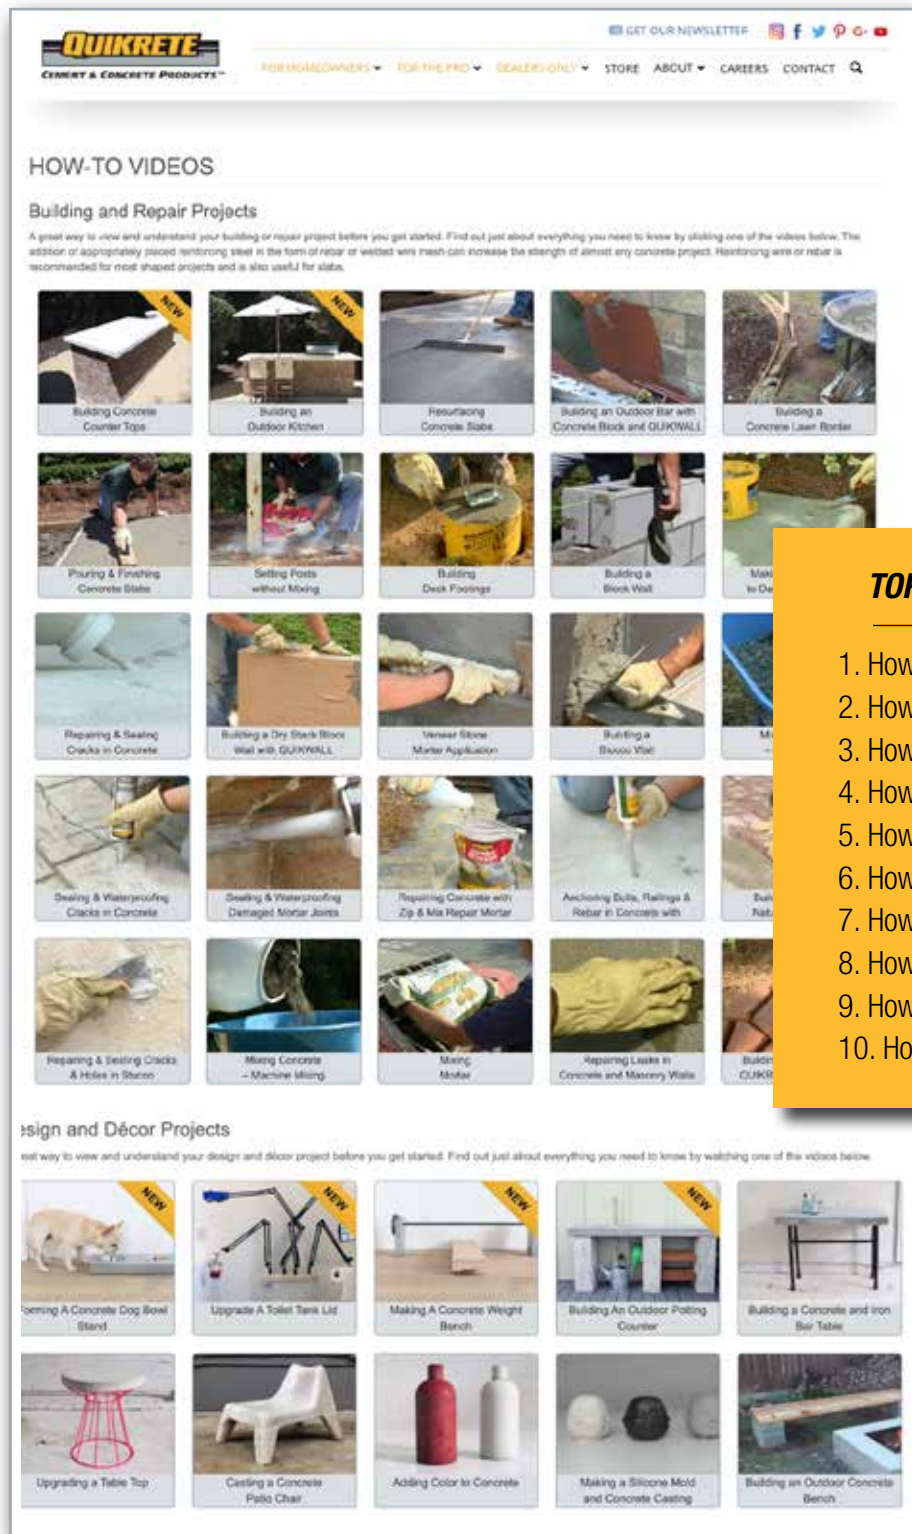

HOW-TO PROJECT VIDEOS

- Over **50 How-To Project Videos**
- More than **2 Million Hours Viewed**
- Video Views Are A Key Indicator of Project Interest

LINK TO
PROJECT VIDEOS >



TOP QUIKRETE.COM PROJECT VIDEOS

1. How to Set Posts Without Mixing
2. How to Pour & Finish Concrete Slabs
3. How To Resurface Concrete Slabs
4. How to Build Concrete Counter Tops
5. How to Build Deck Footings
6. How To Make Thin Repairs to Damaged Concrete
7. How To Build a Concrete Lawn Border
8. How To Build a Block Wall
9. How to Hand Mix Concrete
10. How to Repair & Seal Cracks in Concrete

ALSO VIEWABLE ON MOBILE DEVICES

Customers can easily access video content using their mobile phone or tablet as well as by visiting the desktop site.



Consumers spend nearly 50% of their time online on social media, with the majority being allotted to Facebook. With this in mind, The **QUIKRETE®** Company instituted an integrated, promotional campaign called the **QUIKRETE®** One Bag Wonder Contest.



FACEBOOK

- Over **415,000 Fans** Sharing Projects Through Photos and Videos



QUIKRETE® challenged fans and entrants to create a project, using just one bag of **QUIKRETE®**



QUIKRETE® created the Concrete Coffee Table Book to showcase over 60 project entries from the One Bag Wonder annual contests.

TECHNICAL CENTER

The **QUIKRETE®** Company continues to be an industry leader in new product research and innovation, committed to developing new products to meet the evolving needs of the homeowner and professional user.

The **QUIKRETE®** Technical Center also routinely evaluates production samples to assure that all products meet or exceed ASTM standards and provide consistent quality throughout our more than 100 production facilities serving the United States, Puerto Rico, Canada, Central and South America.

The **QUIKRETE®** Help Center is available to provide technical support to your contractors and consumers 24/7 at (800) 282-5828.





REPAIR PRODUCT BAYS

- Organized Display Categorizes Product
- Overhead Signage Gives Product Overviews
- Improves Shopping Experience
- Product Mix is Customized by Account
- QR Code



TEAR PADS & BROCHURES

- Project Oriented
- Step-by-Step Instructions
- Tools and Materials Needed Sections
- Bilingual
- QR Codes

SUPPORTING YOUR SALES TEAM



BANNERS & OVERHEAD SIGNS

- Product Selection Guidance
- Provides Project Inspiration
- Directs Customer Traffic Flow
- QR Codes

STORE DISPLAYS & MINI PALLET

- Increase Impulse Purchases
- Feature New Products
- QR Codes linking to product info



NEW DISPLAY CASES & BIN TAGS

- Product Descriptions
- Quantity Calculators
- Bilingual
- Application Photography
- Feature / Performance Icons



FULL COLOR GRAPHIC PACKAGING

- Application Images Aid in Product Selection
- New Commercial Grade **QUIKRETE**® Packaging
- QR Codes connected to project training



PRODUCT GUIDE



Mfr. No. 110125
Ship Weight 25 kg bag | 56 bags/pallet

CONCRETE MIX

For general concrete construction and repair of concrete where thickness in excess of 2" is required

Used For:

- Foundation walls & footings
- Sidewalks, curbs, steps, ramps and walkways
- Appliance and equipment platforms
- Pipe and post footings
- Floor slab and patios
- Pools, fish ponds, stepping stones
- Riprap and slope protection
- Driveway repairs

Features:

- Consists of cement, sands and coarse aggregates pre-mixed for quality and convenience.
- Approx. 4000 psi (27.6 MPa) in 28 days
- Sets in approximately 4 hours at 20° C (68° F)

Coverage: # 25kg Bags required at 4 inch thickness

AREA	1ft	2ft	3ft	4ft
1ft	1	2	3	3
2ft	2	3	5	6
3ft	3	5	7	9
4ft	3	6	9	12
5ft	4	8	12	15



Mfr. No. 100465
Ship Wt. 25 kg bag | 56 bags/pallet

POST HASTE® CONCRETE MIX

A fast setting concrete.

Used for:

- Setting posts
- Signs
- Footings
- Other concrete applications

Features:

- Sets in 20 minutes.
- Eliminates; bracing, construction delays, rain washouts and unwanted depressions
- Approx. 2500 psi (17.2 MPa) in 28 days

Coverage: Setting posts (# of bags per hole)

Depth of Hole in Inches (Metres)	19 (.46)	24 (.61)	30 (.76)	36 (.91)	42 (1.07)	48 (1.22)
Post 3" (75mm) Hole Dia. 9" (230mm)	2	2	3	3	4	4
Post 4" (100mm) Hole Dia. 12" (300mm)	2	2	3	3	4	4

1 x 25kg bag = 0.44 ft³



Mfr. No. 100425
Ship Wt. 25 kg bag | 56 bags/pallet

FAST-SETTING CONCRETE MIX

A fast setting concrete with fast strength gain.

Used for:

- Setting posts
- Slabs
- Signs
- Footings

Features:

- Set posts without mixing
- Sets hard in 20-40 minutes
- Walk on it in 2 hours
- 1000 psi in 24 hours
- Approx. 4000 psi (27.6 MPa) in 28 days



Coverage - Setting Posts (# of 25 kg (55 lb) bags per hole)

Depth of Hole (inches)	19 (.46)	24 (.61)	30 (.76)	36 (.91)	42 (1.07)	48 (1.22)
Post 3"	2	2	3	3	4	4
Post 4"	2	2	3	3	4	4

Coverage - Slabs (# of 25 kg (55 lb) bags)

Square Feet (inches)	2 (0.2)	5 (0.5)	10 (0.9)	25 (2.3)	50 (4.7)	100 (9.3)
4" (100 mm) thick	2	4	8	20	40	79
6" (150 mm) thick	3	6	12	30	60	118

All yields are approximate and do not allow for waste or uneven sub-grade, etc | 1 x 25 kg bag = 0.44 ft³



Mfr. No. 100725
Ship Wt. 25 kg bag | 56 bags/pallet

PSI 6000

Construction and repair of concrete where extra strength is required. Exceeds the requirements of ASTM C387

Used for:

- Slabs
- Steps
- Patios
- Deck support
- Curbs, Patching existing concrete
- Driveways

Features:

- High strength concrete (6000 psi) (41 MPa) in 28 days.
- Fast strength gain (1 day = 2000 psi).
- Walk on in 8 hours.
- Allows construction in 24 hours
- Withstands higher impact and wears longer than regular concrete
- Less shrinkage

Coverage: # 25kg Bags required at 4 inch thickness

AREA	1ft	2ft	3ft	4ft
1ft	0.75	1.5	2.3	3.0
2ft	1.5	3.0	4.6	6.1
3ft	2.3	4.6	6.9	9.2
4ft	3.00	6.1	9.2	12.3
5ft	3.8	7.7	11.5	15.3





Mfr. No. 110682
Ship Wt. 36.3 kg bag | 42 bags/pallet

COUNTERTOP MIX

Countertop Mix is a flowable, high strength commercial grade concrete mix designed for use in concrete countertops, requiring only the addition of water.

Used for:

- Countertop Mix is designed specifically for casting concrete countertops.

Features:

- Super-plasticizer additive provides a flowable mix at the low water / cement ratio.
- High-flow formula minimizes the need for mechanical vibration.
- Reduced-shrinkage formulation.
- Approximately 6,000 psi (41 Mpa) in 28 days.

Coverage: # of 36.3 kg bags required				
Square feet (M ²)	6 (0.56)	10 (0.93)	25 (2.23)	50 (4.65)
1.5" thick (37 mm) # of 36.3 kg (80 lb)	2	3	6	11
2" thick (50 mm) # of 36.3 kg (80 lb)	2	3	7	14
3" thick (75 mm) # of 36.3 kg (80 lb)	3	5	11	21



Mfr. No. 9991025
Ship Wt. 27.22 kg bag | 48 bags/pallet

STACK & BANK

A bagged dry concrete product designed specifically for use in a variety of erosion control and support systems.

Used for:

- Headwalls for bridge abutments, vehicle underpasses and drains.
- Ramps, retaining walls and loading docks.
- Small dams for erosion control, reservoirs, irrigation and stock watering.
- Piers for small bridges and docks.
- Cradle supports for tanks and pipes.
- Boat slipways and small sea walls.

Features:

- TARGET® Stack and Bank applications have the advantages over conventional concrete construction of speed of placement and low labor cost, brought about by the elimination of concrete forming, mixing, placing and finishing operations.

GROUT & MASONRY PRODUCTS



Mfr. No. 158556
Ship Wt. 22.7 kg bag | 56 bags/pallet

PORTLAND EXPANDING GROUT

A high-strength non-shrink grout used for the following applications.

Used for:

- Grouting under columns and base plates
- Anchoring of posts and bolts into concrete
- Filling voids and cracks
- Repair to concrete structures

Features:

- High strength – up to 8800 psi (60.5 MPa)
- 3200 psi (22 MPa) in 24 hours
- Non-shrink
- Up to 6" in thickness

Coverage: # of 22.7 kg bags required for 1" or 2" topping					
Square feet (M ²)	5 (0.5)	10 (0.9)	20 (1.9)	35 (3.3)	50 (4.7)
1" thick (25 mm) # of 36.3 kg (80 lb)	1	2	4	7	10
2" thick (50 mm) # of 36.3 kg (80 lb)	2	4	8	14	20



Mfr. No. 158553
Ship Wt. 22.7 kg bag | 30 bags/pallet

FASTSET™ ALL-CRETE™ NON-SHRINK GROUT

FastSet All-Crete is a fast setting non-shrink structural grout for concrete construction and repair.

Uses:

- Anchor bolts
- Bearing plates
- Floor leveling and repair
- Steel column bases
- Precast concrete keyways
- Roads and bridges
- Filling voids and cracks.

Features:

- Structural concrete repairs from 1/4" to 24" deep
- Sets in 30 minutes
- Mix to fluid flowable and plastic consistency
- Up to 8000 PSI (55.1 MPa) in 28 days

Coverage - Slabs (# of 22.7 kg (50 lb) bags)						
Thickness	2 (0.2)	5 (0.5)	10 (0.9)	15 (1.4)	20 (1.8)	50 (4.6)
1" (25 mm)	1	1	2	3	4	9
2" (50 mm)	1	2	4	5	6	17
3" (75 mm) *	1	2	4	6	8	10
4" (100 mm)	1	3	5	8	11	26

* Extended with 11.35 kg (25 lb) ½" (12 mm) gravel per bag.





Mfr. No. 124152
Ship Wt. 22.7 kg bag | 30 bags/pallet

FASTSET™ MORTAR REPAIR

QUIKRETE FastSet Repair Mortar is a rapid setting structural mortar for repairing all concrete surfaces including vertical and overhead applications.

Uses:

- Walls
- Bridges
- Tunnels
- Sewers, culverts
- Columns

Features:

- Superior bonding
- Sets in 20 minutes
- High strength 2000 PSI (13.8 Mpa) in 3 hours
- 6000 PSI (41.4 MPa) in 28 days

Coverage - Slabs (# of 22.7 kg (50 lb) bags)

Thickness	2 (0.2)	5 (0.5)	10 (0.9)	15 (1.4)	20 (1.8)	50 (4.6)
1" (25 mm)	1	1	2	3	4	9
2" (50 mm)	1	2	4	5	6	17
3" (75 mm) *	1	2	4	6	8	10
4" (100 mm)	1	3	5	8	11	26

* Extended with 11.35 kg (25 lb) ½" (12 mm) gravel per bag.



Mfr. No. 113655
Ship Wt. 25 kg bag | 56 bags/pallet

MASON MIX (TYPE S MORTAR)

Contractor grade, type 'S', pre-blended mortar.

Used for:

- Brick construction
- Stone construction
- Repairing mortar joints
- Block construction
- Base coat for stucco

Features:

- Pre-blended, just add water
- High strength
- Exceeds ASTM C270 requirements

Coverage

- 1 bag lays 40 bricks
- 1 bag lays 18 standard blocks (16" x 8" x 8")
- 1 bag = 22 sq ft of base coat at ¼" thick



Mfr. No. 115525
Ship Wt. 25 kg bag | 56 bags/pallet

WATER RESISTANT PARGING MIX

Masonry coating and patching of concrete walls for cosmetic purposes.

Used for:

- Concrete block
- Concrete & masonry walls
- Base coat for stucco

Features:

- Easy to apply
- Strong bond
- Resists water penetration
- Can be applied above and below grade

Coverage - # of 25 kg (55 lb) bags

Square Feet (M ²)	25 (2.3)	50 (4.7)	300 (27.9)	500 (46.5)	1000 (92.9)
1/8" thick (3 mm)	1	2	8	13	25
1/4" thick (6 mm)	1	2	4	5	6

All yields are approximate and do not allow for waste or uneven sub-grade, etc.



Mfr. No. 123151
Ship Wt. 22.7 kg bag | 35 bags/pallet

QUIKWALL SURFACE BONDING CEMENT

QUIKWALL Surface Bonding Cement is a premium resurfacing product. It eliminates the need for mortar in block wall construction.

Used for:

- Surface bonding and resurfacing of concrete and masonry walls

Features:


- Strengthens and waterproofs block walls without mortar
- Superior bond
- Interior and exterior use

Coverage - # of 25 kg (55 lb) bags

Square Feet (M ²)	25 (2.3)	50 (4.7)	300 (27.9)	500 (46.5)	1000 (92.9)
1/8" thick (3 mm)	1	1	6	10	20
1/4" thick (6 mm)	1	2	12	20	40

All yields are approximate and do not allow for waste or uneven sub-grade, etc.



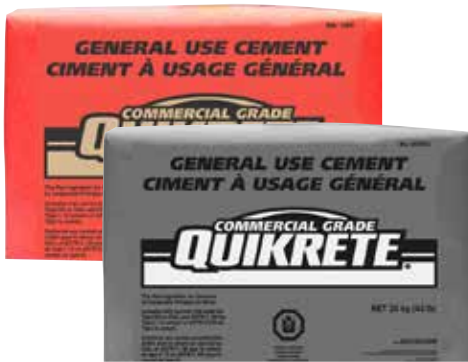

GU/GUL CEMENT

Portland Cement is a basic ingredient for general purpose concrete

Used for:

General purpose concrete

Features:

Just add: fine aggregate, coarse aggregate and clean water
Easy to transport to remote area

Mfr. No.	112425	405942
Ship Wt.	40 kg bag	20 kg bag
	40 bags/pallet	72 bags/pallet



MIX PROPORTIONS FOR CONCRETE MIX:					
CONCRETE STRENGTH	CEMENT	WATER (1)	FINE AGGREGATE (2) (DAMP)	COARSE AGGREGATE (3)	VOLUME
20 MPa	1 bag 40 kg	24 L	140 kg	125 kg	0.14 m ³ (5 cu ft)
25 MPa	1 bag 40 kg	22 L	115 kg	120 kg	0.13 m ³ (4.5 cu ft)
30 MPa	1 bag 40 kg	20 L	105 kg	110 kg	0.12 m ³ (4.2 cu ft)
32 MPa (with air entrainment) **	1 bag 40 kg	18 L	95 kg	100 kg	0.11 m ³ (3.8 cu ft)



Mfr. No. 112532

Ship Wt. 30 kg bag | 40 bags/pallet

MCS (MORTAR S) CEMENT

Mortar S Cement, is a type 'S' cement.

- Used for:
 - Mortars
- Making:
 - Parging
- Stucco-finish
 - Other masonry applications.
- Base Coat

Features:

Mortar S Cement only requires the addition of sand and water for masonry applications

Coverage

Mix 1 - 34 kg bag of mortar cement with 2-1/4" to 3 parts loose, damp sand for mortar applications



HE (TYPE 30) PORTLAND CEMENT

Type HE is a High Early Strength Portland Cement.

Used for:

- Applications where high early strengths are required

Mfr. No. 112479

Ship Wt. 40 kg bag | 40 bags/pallet



HS (TYPE 50) PORTLAND CEMENT

LAFARGE Type HS Portland Cement

Used for:

- Applications that require high levels of sulphate resistance.

Mfr. No.	9994022	9994005
Ship Wt.	20 kg bag	40 kg bag
	72 bags/pallet	40 bags/pallet





WHITE PORTLAND CEMENT | FEDERAL WHITE

White Portland Cement Type I is a true Portland cement

Used for:

- White or coloring applications.
- Federal White Cement can be used for all types of architectural or structural concrete construction where a whiter or brighter color may be needed for aesthetic or safety reasons.
- Federal White Cement may also be used to satisfy low alkali requirements.

Mfr. No. 9994010

Ship Wt. 42 kg bag | 40 bags/pallet



PORTLAND LIME CEMENT BLEND

TARGET Portland Cement Lime Blend is used for making mortars - ensuring uniformity during construction. It is prepared under tight quality control standards to ensure consistency.

Used for:

- TARGET Portland Cement Lime Blend yields high strength mortar

Features:

- TARGET Portland Cement lime mortars exhibit superior bond characteristics, less shrinkage and cracking than other mortars resulting in greater resistance to water penetration.

Mfr. No. 405951

Ship Wt. 30 kg bag | 50 bags/pallet



HYDRATED LIME - TYPE 'S'

Used for:

- Mixing with cement and sand to make mortar, stucco and other masonry products
- Agricultural use

Features:

- Fine Grade

Mfr. No. 9994028

Ship Wt. 23 kg bag | 50 bags/pallet



HYDRATED LIME - TYPE 'N'

Used for:

- Mixing with cement and sand to make mortar, stucco and other masonry products
- Agricultural use

Features:

- Fine Grade

Mfr. No. 9994035

Ship Wt. 22.68 kg bag | 50 bags/pallet





Mfr. No. 110326
Ship Wt. 25 kg bag | 56 bags/pallet

SAND / TOPPING

Patching or resurfacing damaged concrete where up to 2" thickness is required.

Used for:

- Driveways, Patios, Sidewalks etc.
- A base for laying flagstone & pavers
- Shower base

Features:

- Consists of cement, fine and coarse sand and admixtures.
- Approx. 4000 psi (27.6 MPa) in 28 days
- Just add water
- Concrete bonding adhesive is required to ensure proper bonding of overlay

Coverage: # of 25 kg bags required					
Square feet (M ²)	5 (0.5)	10 (0.9)	20 (1.9)	35 (3.3)	50 (4.7)
1" thick (25 mm) # of 36.3 kg (80 lb)	1	2	4	7	10
2" thick (50 mm) # of 36.3 kg (80 lb)	2	4	8	14	20



Mfr. No. 113318
Ship Wt. 18 kg bag | 56 bags/pallet

BONDED TOPPING MIX

Concrete repair material designed for thin overlays and repair of concrete up to 1/2".

Used for:

- Overlays
- Levelling
- Damaged and cracked concrete

Features:

- High strength
- Strong bond
- 90 minute set
- Foot traffic in 2.5 hours
- Trowels to a featheredge

Coverage

1 - 18 kg bag = 18 ft sq at 1/4" thickness



Mfr. No. 113148
Ship Wt. 18 kg bags | 56 bags / pallet

RE-CAP CONCRETE RESURFACER

A special blend of portland cement, sand, polymer modifiers and other additives. Designed to provide a shrinkage compensated repair material for making thin repairs to sound concrete in need of surface renewal. Can be squeegee, trowel or brush applied.

Used for:

- Sidewalks
- Concrete Floors
- Patios
- Floors
- Pool Decks
- Driveways
- Parking Decks
- Curbs

Coverage - Squeegee Application					
Square Feet (m ²)	35 (3.3)	90 (8.4)	200 (18.6)	300 (27.9)	500 (46.5)
1/16" (1.5mm) thick # of bags	1	2	3	4	7
Coverage - Thicker Application					
1/8" (3mm) thick # of bags	1	3	6	9	14
1/4" (6mm) thick # of bags	2	5	11	17	27
3/8" (9mm) thick # of bags	3	7	15	23	29

All yields are approximate and do not allow for waste or uneven sub-grade, etc.



Mfr. No. 124958
Ship Wt. 22.7 kg bag | 35 bags/pallet

FAST-SET SELF-LEVELING FLOOR RESURFACER

QUIKRETE New & Improved Fast-Setting Self-Leveling Floor Resurfacer is a self-finishing floor topping and underlayment specially formulated to work without troweling.

Used for:

- Precast concrete plank
- New concrete floor slabs with unacceptable finishes
- Existing concrete floors with damaged finishes
- Over wood floor systems, utilizing expanded metal lath reinforcement
- May be used for outdoor service

Features:

- Can be used as a wear surface for light industrial floors.
- Works without troweling.

Coverage

1 - 22.7 kg bag = 14 L (0.50 cu)
At 6.4 mm (1/4") thick each bag will cover approx. 2.3 m² (25 ft²) of flat surface



REPAIR PRODUCTS - BAGS



Mfr. No. 170125
Ship Wt. 25 kg bag | 30 bags/pallet

BLACKTOP PATCH

Blacktop Patch is an asphalt cold patch for repairing potholes and large cracks over 25 mm (1 inch).

Used for:

- Asphalt pavements such as driveways
- Parking lots
- Roads
- Playground and pathways

Features:

- Ready to use
- No mixing or heating required
- Traffic can begin immediately after levelling and compacting

Coverage

1 - 25 kg bag = 2 ft sq at 12" thickness



SANDS AND AGGREGATE PRODUCTS



Mfr. No. 111325
Ship Wt. 25 kg bag | 48 bags/pallet

PREMIUM PLAY SAND

A versatile sand.

Used for:

- Children's sandbox
- Traction for snowy and icy surfaces
- Base and between joints for concrete pavers
- Lawn and garden conditioner

Features:

- Heat sterilized
- Washed and screened
- Free of most dust

Coverage

1 - 25 kg bag = 1/2 cubic ft (12" x 12" x 6" thick)



Mfr. No. 115125
Ship Wt. 25 kg bag | 30 bags/pallet

ALL PURPOSE GRAVEL

Multi use gravel for decorative and landscaping applications.

Used for:

- Landscaping
- Drainage
- Window wells
- Fish ponds
- Concrete

Features:

- Easy to pour
- Easy to store
- Easy to transport
- Durable plastic bag

Coverage

1 - 25 kg bag = 1/2 cubic ft (12" x 12" x 6" thick)



Mfr. No. 115155
Ship Wt. 25 kg bag | 30 bags/pallet

BASE ROCK

A levelling base for masonry products and other applications.

Used as a base for:

- Pavers
- Flagstone
- Brick
- Retaining walls
- Walkways and Driveways

Features:

- Saves time
- Professional quality
- Easy to use
- Durable plastic bag

Coverage

1 - 25 kg bag = 1/2 cubic ft (12" x 12" x 6" thick)





Mfr. No. 115036
Ship Wt. 36 kg bag | 42 bags/pallet

PATIO PAVER JOINTING SAND

Properly graded fine sand for filling joints between pavers, flagstone and other masonry products.

Used for:

- Patios
- Sidewalks
- Driveways

Features:

- Washed and dried
- Properly screened
- Angular for stability
- Durable plastic bag

Coverage

36 kg (80 lb) bag = 7 to 9 m² (75 to 100 ft²)



Mfr. No. 115831
Ship Wt. 18 kg bag | 48 bags/pallet

TRACTION SAND

Ideal for traction on all surfaces in icy conditions.

Used for:

- Icy and snowy surfaces
- Added vehicle weight

Features:

- Re-usable poly bag
- Angular
- Easy to pour



Mfr. No. 99933050 99931630 99931240 99932040 99931212
30-50 grit 16-30 grit 12-40 grit 12-50 grit Generic bag
Ship Wt. 22.7 kg bag | 72 bags/pallet

SILICA ABRASIVE

30-50,16-30, 12-40, 12-50, 20-40

TARGET® Silica Abrasives are high quality, close graded silica sands which undergo up to three washings to provide a clean, high quality material.

Uses:

- Target Silica Abrasives are suitable for sandblasting of steel, concrete or wood in preparation for coating or repair, to obtain architectural effects in concrete or wood, an aggregate for cementitious or polymer grouts, mortars and concrete and for foundry mold sand and traction sand.



Mfr. No. 116036
Ship Wt. 25 kg bag | 30 bags/pallet

1/4 DOWN - LIMESTONE

1/4" Down-Limestone provides a firm, stable, foundations for interlocking pavers, flagstone, bricks, patio block, concrete slabs and anchoring of posts.

Used for:

- Paver base
- Walkway base
- Concrete slab base
- Setting Posts

Features:

- Great compaction
- Easy to store
- Easy to transport
- Durable plastic bag
- Only available from Winnipeg Plant

Coverage

1 - 25 kg bag = 1/2 cubic ft (12" x 12" x 6" thick)





POLYMERIC JOINTING SAND

Mfr. No. 137556

Ship Wt. 18 kg bag | 70 bags/pallet



LIMESTONE SCREENINGS

Mfr. No. 137546

Ship Wt. 18 kg bag | 70 bags/pallet



PEA GRAVEL

Mfr. No. 137510

Ship Wt. 18 kg bag | 70 bags/pallet



WHITE ROCK

Mfr. No. 137504

Ship Wt. 18 kg bag | 70 bags/pallet

Earth Essentials Polymeric Jointing Sand Calculator - No. of 18 kg (39.5 lb) bags

M ² (square feet)	1.5 (16)	5.9 (64)	9.2 (100)	13.3 (144)	37.2 (400)
6 mm (1/4 in) thick	1	2	3	5	12
12 mm (1/2 in) thick	1	4	6	8	22
25 mm (1 in) thick	2	7	10	14	39
50 mm (2 in) thick	3	10	16	23	63

*Based on standard 50 mm x 100 mm x 200 mm (2 in x 4 in x 8 in) Usage will be different for other brick sizes. All yields are approximate and do not include allowance for waste, uneven joint wide etc.



PLAY SAND

Mfr. No. 137550

Ship Wt. 18 kg bag | 70 bags/pallet



BEACH PEBBLES

Mfr. No. 137517

Ship Wt. 18 kg bag | 70 bags/pallet



DRAINAGE GRAVEL

Mfr. No. 137520

Ship Wt. 18 kg bag | 70 bags/pallet

EarthEssentials Sand & Rock Calculator - No. of 18 kg (39.5 lb) bags

M ² (square feet)	0.93 (10)	2.3 (25)	4.6 (50)	9.3 (100)	19 (200)
50 mm (2 in) thick	5	11	21	42	84
75 mm (3 in) thick	7	16	32	63	125
100 mm (4 in) thick	9	21	42	84	167
150 mm (6 in) thick	13	32	63	125	250

* Estimated amount needed with a typical waste factor



QUIKTUBES BUILDING FORMS

The QUIK-TUBE® Building Forms are ridged fibre building form tubes that eliminate the need to build wood forms.

Used for:

- Mailbox bases
- Deck supports
- Columns

4 ft No. 692201 692202 692203

Size 8" x 4' 10" x 4' 12" x 4'
Min Order 4 4 4

8 ft No. 692315 692251 692252 692253

Size 6" x 8' 8" x 8' 10" x 8' 12" x 8'
Min Order 3 4 4 4



Mfr. No. 131720 131721 131722 131723

Colour: Charcoal Brown Buff Red

Ship Wt. 296 ml - 12 bottles/case

LIQUID CEMENT COLOUR

A liquid coloring agent used to customize the color of your concrete project.


Add correct amount of dry concrete mix or mortars to water for a proper consistency. One bottle will mix with two 25kg (55lb) bags of Concrete Mix. Available in Red, Brown, Buff, Charcoal.

Used for:

- Adding color to any concrete, mortar, sand topping or stucco project
- Permanent integral color

Features:

- Add colour to a variety of projects including: curbs, driveways, fishponds, and stucco
- Available in 4 colours

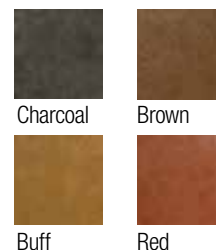

1 piece 3/4" dia. X 20' | 12 per case

BACKER ROD

A foam rope used to partially fill large cracks, gaps and joints before applying sealant. Use for horizontal and vertical applications.

Used for:

- Expansion joints
- Curtain wall joints
- Partitions
- Log construction
- Pavement joints
- Pre-cast units

Features:

- Backer Rod can be used as a temporary seal, or inserted into a joint to control sealant depth
- To create a backstop
- Allows for tooling of sealant
- Allows for proper wetting of the joint surfaces for sealing

Mfr. No. 691741



Mfr. No. 691706

Available in: 5' long strips | 40 strips per carton

EXPANSION JOINT

Made from resilient wood fibers to prevent damage during expansion and contraction of concrete. Weather resistant.

Used for:

- Driveways, sidewalks and patios
- Between concrete slabs and to separate slabs from structures





Mfr. No. 861016
Ship Wt. 0.95L bottle - 6 per case

ACRYLIC FORTIFIER

An acrylic resin admixture designed to enhance bonding and water resistance of concrete patching materials, stucco, surface bonding cement, thin-set mortars and tile grouts. Exceeds the requirements of ASTM C 1438

Used for:

- Improves bonding to existing surfaces
- Eliminates moist curing in most circumstances
- Reduces permeability

Features:

- Increases bond
- Strengthens concrete
- Helps protect concrete from environment

Mixing

Shake well before using.

Use the recommended amount of Concrete Acrylic Fortifier along with sufficient water to provide proper consistency.

For QUIKRETE® Quick-Setting Cement & QUIKWALL® Surface Bonding Cement, add 1.9 L of Concrete Acrylic Fortifier per 22.7 kg bag



Mfr. No. 860112
Ship Wt. 946 ml | 6 per case

CONCRETE & ASPHALT CLEANER - CONCENTRATE

A multi-purpose cleaner that is safe to use on any hard surface where water can be used. Use prior to any repair project to achieve the strongest bond. Non-toxic, non-flammable and contains no acid.

Used for:

Removing soil grease, oil, etc. from all types of masonry, concrete, mortar and grout

Cleans:

- Brick
- Slate
- Flagstone
- Quarry tile
- Driveways
- Parking lots
- Garage floors
- Gas stations
- Industrial plant floor
- Tool and lawnmowers
- Grout in ceramic tile

Application

Light soil: One part to 6 parts fresh water.

Medium soil: One part to 4 parts fresh water

Heavy soil: Dilute 1:1 or use full strength.



Mfr. No. 873102
Ship Wt. 3.8 L | 4 pails/case

ACRYLIC CONCRETE CURE & SEAL

Concrete sealer is used for curing, protecting and sealing concrete surfaces.

Used for:

- Curing new concrete
- Protects concrete against water, salt, oils etc.
- Protects concrete against graffiti on concrete walls
- Protects concrete from environment

Features:

- Attractive satin look
- Makes surface easier to clean
- Can be sprayed, broomed or roller applied

Coverage

1 x 3.8 L = 14-18 m² (150-200 ft²)





Mfr. No. 113304
Ship Wt. 4.5 kg pail | 4 pails/case

BONDED TOPPING MIX

Concrete repair material designed for thin overlays and repair of concrete up to 1/2".

Used for:

- Overlays
- Levelling
- Damaged and cracked concrete

Features:

- High strength
- Strong bond
- 90 minute set.
- Foot traffic in 2.5 hours
- Trowels to a feather-edge

Coverage

1-4.5 kg pail = 3¼ ft sq at ¼" thickness



Mfr. No. 112612 112606
Ship Wt. 4.5 kg pail 9 kg pail | 4 pails/case

HYDRAULIC WATERSTOP CEMENT

Rapid setting, high strength repair material designed to plug active water leaks instantly in concrete and masonry.

Used for:

- Basement walls
- Retaining walls
- Swimming pools
- Instant anchoring
- Foundation walls

Features:

- High strength (2000 psi (13.8 MPa) in 30 minutes)
- 3-5 minute set

Coverage

1 x 4.5 kg pail will fill a crack ½" W x 1 ½" D x 15' L



Mfr. No. 124512
Ship Wt. 4.5 kg pail | 4 pails/case

ANCHORING CEMENT

Rapid setting grout.

Used for:

- Anchoring of posts, rails and bolts in concrete
- Filling of cracks and voids
- Patching concrete

Features:

- High strength (2000 psi (13.8 MPa) in 2 hours, 7000 psi (48.3 MPa) at 28 days)
- Fast setting (10-30 minutes)
- Flowable

Coverage

1 x 4.5 kg pail will yield approximately 0.08 cu ft (2.4 L)



Mfr. No. 124012
Ship Wt. 4.5 kg pail | 4 pails/case

QUICK-SETTING CEMENT

For concrete repairs where rapid setting is required.

Used for:

- Steps
- Curbs
- Walls
- Overhead

Features:

- Sets fast (10-15 minutes)
- High strength, strong bond
- Can be applied horizontally, vertically and overhead
- Can be molded or sculpted

Coverage

1 x 4.5 kg pail will yield approximately 0.08 cu ft (2.4 L)





Mfr. No. 990203 990216
Ship Wt. 3.8L bottle 0.95L bottle
 4 per case 6 per case

CONCRETE BONDING ADHESIVE

Permanently bonds new concrete to existing concrete.

Used for:

- Bonding new concrete to old concrete
- Bonding new plaster and stucco to old plaster and stucco

Features:

- Indoor/Outdoor application
- Apply by brush roller or spray to the thickness of a coat of paint
- Concentrated

Coverage

Paint-on application: 14-28 m² (150-300 ft²) per 3.8 L
 Slurry coat application: 7 m² (75 ft²) per 3.8 L



Mfr. No. 865036
 Ship weight: 946 ml | 12 per case

CONCRETE PATCHING COMPOUND

A ready-to-use concrete repair for making repairs to cracks, holes and breaks (up to 1/4" wide) in concrete, stucco or masonry walls, sidewalks, patios, driveways, etc.

Used for:

- Repairs and fills spalls (surface imperfections) and cracks up to 1/4" (6 mm) deep in concrete, masonry, stucco, sidewalks, patios, walkways and steps.

Features:

- No mixing required
- Dries quickly to a durable and flexible finish
- Weather resistant
- Excellent adhesion
- Textured to blend with concrete surfaces
- Easy clean up with water before product dries
- Use for non-structural cosmetic repairs

Coverage

3.25 sq ft (0.3 M²) at a 1/8" (3 mm) thickness.



Mfr. No. 124116
 Ship Wt. 1.36 kg bag | 6 bags per case

ZIP AND MIX REPAIR MORTAR

ZIP AND MIX Repair Mortar is a structural mortar repair.

Used for:

- Repairing concrete, masonry and stucco surfaces up to 2 inches in thickness. It can be used on driveways, sidewalks, patios, steps, concrete and masonry walls.

Features:

- Just add water to bag, mix and apply
- Use on vertical and horizontal surfaces
- Superior bonding
- 4500 psi (31.3 MPa) in 28 days

Coverage

Each 1.36 kg bag will yield 0.03 cubic feet of material



Mfr. No. 865033
 Ship Wt. 0.95 L pail | 12 pails / case

PRE-MIXED STUCCO PATCH

A ready-to-use acrylic stucco repair.

Used for:

- Making repairs to cracks, breaks and holes up to 1/4" (6 mm) thick in stucco surfaces.

Features:

- Dries to a durable and flexible finish
- Sanded formula blends with the texture of surrounding stucco

Coverage

Each 0.95 L (1 qt) pail will cover approx 3.25 sq. ft (0.3 M²) at 1/8" (3 mm) thickness.





Mfr. No. 120145
Ship Wt. 4.5 kg pail | 4 pails/case

EXTERIOR STUCCO PATCH

A finish coat stucco.

Used for:

- Repairing broken, cracked or damaged stucco.

Features:

- White in colour
- Resistant to shrinkage cracks
- Can be textured and colored to match existing stucco
- Paintable

Coverage

1 x 4.5 kg pail yields 5 m² (6 ft²) @ 1/4"



REPAIR PRODUCTS – JOINT AND CRACK REPAIR



Mfr. No. 865011
Ship Wt. 296 ml | 6 tubes / case

GREY CONCRETE CRACK SEALER

Stucco Crack Repair is an easy to use crack repair for stucco.

Used for:

- Filling and sealing cracks in stucco up to 12 mm (1/2")

Features:

- Blends with texture of surrounding stucco
- Paint after 24 hours
- Works on horizontal and vertical surfaces
- Excellent adhesion

Coverage

1 X 946 ml fills approximately: 18 m (60 ft) of crack at 1/4" x 1/4"



Mfr. No. 862012
Ship Wt: 296 ml | 12 tubes/case

CONCRETE REPAIR

A superior sanded acrylic latex formulation for crack repair in concrete, including concrete, stucco or masonry walls, sidewalks, patios and driveways.

Used for:

- Repairing and filling cracks up to 12 mm (1/2") in concrete, masonry, stucco, sidewalks, patios and driveways
- Vertical or horizontal surfaces

Features:

- Dries quickly to a tough and flexible finish
- Helps prevent water and ice damage to concrete surfaces
- Weather resistant
- Excellent adhesion
- Textured to blend with concrete surfaces
- Easy clean up with water before product dries

Coverage

1 x 296 ml tube will yield about 7.3 m at a 6 mm (1/4") diameter bead or 3.7 m (12 linear feet) for a 9 mm (3/8") diameter bead



Mfr. No. 865011
Ship Wt. 296 ml | 6 tubes / case

STUCCO CRACK REPAIR

Stucco Crack Repair is an easy to use crack repair for stucco.

Used for:

- Filling and sealing cracks in stucco up to 12 mm (1/2")

Features:

- Blends with texture of surrounding stucco
- Paint after 24 hours
- Works on horizontal and vertical surfaces
- Excellent adhesion

Coverage

1 x 296 ml tube will yield 3.7 m (12 linear feet) at 6 mm (1/4") bead.





Mfr. No. 862002
Ship Wt. 296 ml | 6 tubes/case

MORTAR REPAIR

Acrylic repair for mortar joints.

Used for:

- Re-pointing and repairing mortar joints
- Concrete crack repair

Features:

- Square applicator tip for easy application
- Flexible
- Strong bond
- Mortar grey
- Fits standard caulking gun

Coverage

1 x 295 ml fills 10 ft of 3/8" x 3/8" voids



Mfr. No. 862019
Ship Wt. 296 ml | 12 tubes/case

POLYURETHANE MORTAR JOINT SEALANT

Polyurethane Mortar Joint Sealant is a high performance construction grade polyurethane sealant.

Used for:

- Waterproofing and sealing mortar joints and bonds to most construction materials.

Features:

- Excellent adhesion
- Non-sag formulation
- Dries to touch in 2 hours
- Flexible

Coverage

1 x 10.1 oz (296 ml) tube can be applied to approximately 12 linear feet (3.7 m) in a 3/8" (10 mm) bead



Mfr. No. 866012 **866032**
300 ml tube 858 ml tube
12 tubes / case 6 tubes / case

POLYURETHANE SEALANT GRAY – SELF LEVELLING

Polyurethane Self-Levelling Sealant is a high performance construction grade polyurethane sealant.

Used for:

- Sealing cracks and joints in horizontal concrete surfaces. It can be used for concrete floors, driveways, patios, steps, basements, pool decks and more.

Features:

- Superior adhesion
- Durable and flexible
- Resistant to moisture
- Virtually no shrinkage

Coverage

1 x 300 ml 12 linear feet (3.7 m) at 1/2" x 1/4" (12 x 6 mm) joint
1 x 858 ml 34.8 linear feet (10.6 m) at 1/2" x 1/4" (12 x 6 mm) joint





POLYURETHANE SEALANT – NON-SAG

A high performance, construction grade polyurethane sealant designed for vertical and overhead surfaces.

Used for:

- Vertical or horizontal expansion joints in concrete, stucco or masonry
- Caulking around window and door openings
- Sealing skylights and chimney flashings

Features:

- The non-sag formula provides superior adhesion and flexibility. Meets ASTM C 920, Type S, Grade NS.

Coverage

1 x 295 ml yields 12 linear feet (3.6 m) at ½" x ¼" (13 x 6.3 mm) joint



Mfr. No. 866013

Ship Wt. 295 ml tube | 12 tubes / case



FAST SET™ ANCHORING EPOXY

FASTSET™ Anchoring Epoxy is a commercial grade, fast-setting, two component structural epoxy.

Used for:

- Anchoring such things as bolts, rebar, railings, threaded rod, etc, in concrete, masonry and rock.

Features:

- Sets fast (in 3-4 minutes)
- High strength
- Non-sag
- For vertical and horizontal applications
- Sets in sub-zero temperatures



Mfr. No. 862032

Ship Wt. 254 ml tube | 6 tubes / case



COMMERCIAL GRADE POLYURETHANE ADHESIVE

Commercial Grade Adhesive is a high performance, construction grade adhesive.

Used for:

- Permanently bonding concrete masonry and all types of construction materials such as wood, glass, metal and plastic.

Features:

- Superior bond
- Water resistant
- Freeze/thaw resistant
- Flexible

Coverage

1 x 300 ml 12 linear feet (3.7 m) at ½" x ¼" (12 x 6 mm) joint

1 x 858 ml 34.8 linear feet (10.6 m) at ½" x ¼" (12 x 6 mm) joint



Mfr. No. 990212 990213

Ship Wt. 300 ml 858 ml
12 per case 6 per case



XYPEX HIGH 'N DRY

For permanent waterproofing of concrete.

Used for:

- Basement walls
- Retaining walls
- Concrete ponds

Features:

- Penetrates deep into concrete
- Withstands water pressures
- Easy to apply
- Works under wet conditions
- Can be applied to the inside or outside of basement walls

Coverage

1 lb. Covers 6 sq. ft. / 800 g covers 1 m²
 2.27 kg (5 lb) covers 30 sq. ft.
 5 kg (11 lb) covers 66 sq. ft.
 11 kg (24.25 lb) covers 145.5 sq. ft.



Mfr. No. 9991058 9991059 9991060

Ship Wt. 11 kg pail 5 kg pail 2.27 kg pail
 1 per case 1 per case



XYPEX PATCH 'N PLUG

A specially designed, fast setting, non-shrink, high-bond-strength, hydraulic cement compound for concrete patching and repair. Patch 'n Plug stops flowing water in seconds and is used to seal cracks, tie holes, and other defects in concrete.

Used for:

- Basements walls
- Retaining walls
- Swimming pools
- Instant anchoring
- Foundation walls

Features:

- High strength (2000 psi in 30 minutes)
- 3-5 minutes set
- Non metallic. Non toxic

Coverage

9.1 kg (20 lb) will fill 1/2" W x 1 1/2" D x 30" L
 2.27 kg (5 lb) will fill 1/2" W x 1 1/2" D x 7.5" L



Mfr. No. 9991062 9991063

Ship Wt. 2.27 kg pail 9 kg pail
 6 per case 1 per case





25 kg 55 lb bag

HPC FastSet™ Concrete Mix

BUILD & REPAIR



- Fast setting & high early strength.
- Resume traffic in several hours after set.
- 51 mm to 610 mm (2 in to 24 in) application thickness.
- 20.7 MPa (3000 Psi) @ 3 hours.

Typical Compressive Strengths	
3 hours	20.7 MPa (3000 PSI)
24 hours	34.5 MPa (5000 PSI)
7 days	41.4 MPa (6000 PSI)
28 days	48.3 MPa (7000 PSI)




25 kg 55 lb bag
9 kg 19.8 lb pail

HPC FastSet™ All-Crete™

REPAIR, GROUTING & ANCHORING



- Rapid-setting.
- High early strength and high ultimate strength.
- Can be mixed to 3 different consistencies.
- Can be used as a grout or a repair mortar.

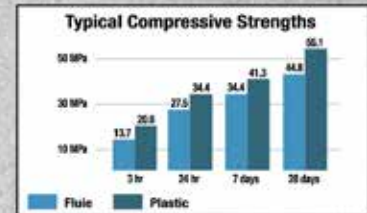

25 kg 55 lb bag
9 kg 19.8 lb pail

HPC FastSet™ Repair Mortar

VERTICAL & OVERHEAD REPAIR



- Vertical or Overhead.
- Polymer modified.
- Fast setting.
- Can be sculpted.
- Very low sag.

Typical Compressive Strengths	
3 hours	13.8 MPa (2000 PSI)
24 hours	27.6 MPa (4000 PSI)
7 days	34.5 MPa (5000 PSI)
28 days	41.4 MPa (6000 PSI)



22.7 kg 50 lb bag

HPC FastSet™ Self-Leveling Floor Resurfacer

WEAR SURFACE OR UNDERLAYMENT



- Fast-setting.
- Interior & exterior.
- Use as wear surface or underlayment.

Typical Compressive Strengths	
24 hours	12.4 MPa (1800 PSI)
7 Days	27.6 MPa (4000 PSI)
28 Days	37.9 MPa (5500 PSI)



Mfr. No. 158753
Ship Wt. 25 kg | 56 bags/pallet

HIGH PERFORMANCE FASTSET™ CONCRETE MIX

A rapid hardening structural concrete. Exceeds the requirements of ASTM C 928 R 3 for concrete repair materials.

Used for:

Construction and repair of:

- pavements, driveways, floors, bridge decks, highways, sidewalks, and concrete parking lots.

Features:

- 25-45 minute set time
- Resume traffic in several hours after set
- 1 1/2" to 24" (3.8 cm to 61 cm) application thickness
- 3000 PSI @ 3 hours

Coverage

1 - 25 kg (55 lb) bag will yield approximately 0.41 ft³ (11 L) of material



Mfr. No. 158753 158727
Ship Wt. 25 kg 9 kg pail
56 per pallet 60 per pallet

HIGH PERFORMANCE FASTSET™ ALL-CRETE™ NON-SHRINK GROUT

A high early strength commercial grade grout, and repair mortar, that requires only the addition of water.

Used for:

- anchoring and grouting of anchor bolts
- retrofitted reinforcing steel and steel column bases
- bearing plates
- precast concrete keyways and other installations that require high early and high ultimate strength
- As a repair material: used to make partial depth or full depth repairs to roads, bridges, industrial floors, and other concrete surfaces

Features:

- 20 – 45 minute set time
- Can be mixed to a plastic, flowable, or fluid consistency
- 1/4" to 24" (.635 cm to 61 cm) application thickness

Coverage

Consistency	Yield / 25 kg (55 lb) bag
Plastic	0.49 ft ³ (13.8 L)
Flowable	0.50 ft ³ (14 L)
Fluid	0.53 ft ³ (15 L)
Repair Mortar	0.48 ft ³ (13.5 L)
Repair Mortar extended with Gravel	0.62 ft ³ (17.5 L)



Mfr. No. 124724 124723
Ship Wt. 25 kg 9 kg pail
56 per pallet 60 per pallet

HIGH PERFORMANCE CEMENT FASTSET™ REPAIR MORTAR

A polymer modified shrinkage compensated, rapid setting, high strength mortar specifically formulated to make structural repairs in vertical and overhead applications. It exceeds requirements of ASTM C928 R2 for structural concrete repair.

Uses:

- Vertical & overhead applications
- Structural repair

Features:

- 20 – 40 minute set time
- Can be sculpted to match the contour of existing concrete surfaces
- Feather edge to 12 in (300 mm) application thickness

Coverage

1 - 25 kg (55 lb) bag will yield approximately 0.50 ft³ (14 L) of material



Mfr. No. 124758
Ship Wt. 22.7 kg | 56 bags/pallet

HIGH PERFORMANCE CEMENT FASTSET™ SELF-LEVELING FLOOR RESURFACER

A self-finishing interior & exterior floor topping and underlayment specially formulated to work without troweling.

Uses:

Produces a smooth surface ready for the installation of:

- ceramic tile
- resilient flooring carpet or other finishes.

Features:

High Performance Cement FastSet™ Self-Leveling Floor Resurfacer can also be used as a wear surface for light duty industrial floors. Following are typical substrates

- Precast concrete plank
- New concrete floor slabs with unacceptable finishes
- Existing concrete floors with damaged finishes
- Over wood floor systems utilizing expanded metal lath reinforcement

Coverage

1 - 22.7 kg (50 lb) bag will provide 0.50 cu ft (14.2 L) of material.
1 - 22.7 kg (50 lb) bag will cover approximately 25 ft² (2.3 m²) of flat surface at 1/4" (6.4 mm) thick

CONCRETE



	Widespread Use	High Strength Earlier	Sets Posts	Sets Posts Without Mixing	Rapid Hardening Structural Concrete
Attributes	<ul style="list-style-type: none"> •Structural concrete mix •Normal set 	<ul style="list-style-type: none"> •High early strength gain •10-12 hr walk-on time 	<ul style="list-style-type: none"> •Sets posts •Sets in 15 to 30 mins 	<ul style="list-style-type: none"> •Sets post without mixing •Sets in 20 to 40 min 	<ul style="list-style-type: none"> •Sets in 25 to 45 mins
Strengths	<ul style="list-style-type: none"> •4000 PSI @ 28 days •1500 PSI @ 3 days 	<ul style="list-style-type: none"> •6000 PSI @ 28 days •2000 PSI # 1 day 	<ul style="list-style-type: none"> •2500 PSI @ 28 days 	<ul style="list-style-type: none"> •4000 PSI @ 28 days 	<ul style="list-style-type: none"> •7000 PSI @ 28 days •3000 PSI @ 3 hours
ASTM	ASTM C 387	ASTM C 387	ASTM C 387	ASTM C 387	ASTM C 928 R-3
Application					
Patios, Sidewalks, etc.	●	●			
Footings	●	●	●	●	●
Driveway Aprons		●			●
Cold Weather Use		●			●
Setting Posts	●		●	●	
Setting Posts w/o Mixing				●	
Steps	●	●			
Columns	●	●			
Walls	●	●			
Curbs	●	●			
Air Conditioner Pads	●			●	
Floors	●	●			
Deck Supports	●	●			
Bridge Deck Repairs					●
Concrete Parking Lots					●
Loading Docks		●			●
Rapid Structural Repair					●

CONTACT INFORMATION - TARGET PRODUCTS LTD.

FOR TECHNICAL SALES & ASSISTANCE | CEMENT & CONCRETE PRODUCTS

SALES REPRESENTATIVES

Mike Coghill	Tel: 1 204 807 3172	Email: mike.coghill@quikrete.ca
Mara Marsden	Tel: 1 604 417 2188	Email: mara.marsden@quikrete.ca
Brent Foster	Tel: 1 403 471 0529	Email: brent.foster@quikrete.ca
Tammy-Lee Klassen	Tel: 1 403 690 2185	Email: tammy-lee.klassen@quikrete.ca

CORPORATE SALES OFFICE

8535 Eastlake Drive Burnaby, BC Canada V5A 4T7	Tel: 1 604 444 3620	Toll Free: 1 800 575 7700
--	---------------------	---------------------------

PLANT LOCATIONS

VANCOUVER PLANT

1080 Bradner Road Abbotsford, BC Canada V4X 1H8	Tel: 1 604 856 7976	Toll Free: 1 888 484 1258 Orders: Abbotsford.Order@Quikrete.ca
MARA MARSDEN	Tel: 1 604 417 2188	Email: mara.marsden@quikrete.ca

CALGARY PLANT

5150 90 Avenue, SE Calgary AB Canada T2C 2T2	Tel: 1 403 279 8189	Toll Free: 1 800 661 8482 Orders: Calgary.Order@Quikrete.ca
BRENT FOSTER	Tel: 1 403 471 0529	Email: brent.foster@quikrete.ca
TAMMY-LEE KLASSEN	Tel: 1 403 690 2185	Email: tammy-lee.klassen@quikrete.ca

WINNIPEG PLANT

400 Pandora Avenue W Winnipeg MB Canada R2C 3A5	Tel: 1 204 654 8320	Toll Free: 1 855 654 8320 Orders: Winnipeg.Order@Quikrete.ca
MIKE COGHILL	Tel: 1 204 807 3172	Email: mike.coghill@quikrete.ca



The QUIKRETE® Companies
5 Concourse Parkway, Suite 1900
Atlanta, GA 30328

1.800.282.5828

www.TargetProducts.com