

# GLASS BLOCK MORTAR MIX (WHITE)


October, 04 Page 1 of 1

## PRODUCT

TARGET® White Glass Block Mortar Mix is an accurate blend of white Portland cement, specially graded fine sands and admixtures to give increased ease of installation and improved water resistance. The product is designed for use in the installation of glass blocks, but is also suitable for other applications where a white mortar is required. The use of this premixed mortar eliminates the variability problems caused by site batching and guarantees a quality material with improved water resistance.

## USES

TARGET White Glass Block Mortar Mix can be used to set and grout all types of glass blocks. It also can be used to repoint or repair existing mortar joints that have been damaged, or for any application requiring a white Portland cement mortar.

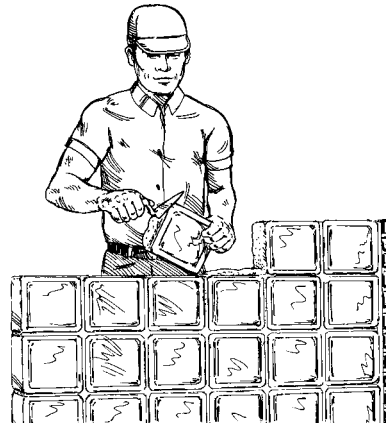

## PROCEDURES

1. Ensure framing is of proper dimension and free of all contaminants and loose materials. Glass blocks should also be clean.
2. Install asphalt emulsion and expansion strips to manufacturer's specifications.
3. Mix mortar thoroughly with clean water to a stiff consistency. Allow material to stand for approximately 5 minutes, then remix before use.
4. Place a full bed of mortar on the base or sill. Do not furrow. Set lower course of glass block and tap into place using wooden or rubber mallet. Set each course of glass block in a full bed of mortar. Smooth out joints at initial set.
5. Anchors and reinforcing to be placed to manufacturer's specifications.
6. Tool joints smooth and concave before mortar takes final set.
7. Excess mortar must be removed from glass block facing before mortar hardens. A stiff bristle brush and damp cloth are preferable for removing the excess mortar.

## CAUTION

TARGET White Glass Block Mortar Mix should not be placed where temperatures are below 10°C (50°F) or above 29°C (85°F) during or for the first 24 hours after installation.

## YIELD

Each bag weighs 22.7 kg (50 lb).

Typical quantities required for standard installations are:

6 inch glass block	100 ft <sup>2</sup>	9 bags
--------------------	---------------------	--------

Product performance is affected by many factors, including storage, method and conditions of application and use. User testing is ESSENTIAL to determine suitability of product for intended method of application and use. Target's SOLE WARRANTY is that the product has been manufactured to specifications. No oral or written information or advice shall increase this warranty or create new warranties. Target's SOLE LIABILITY is to replace product proved defective. In no event shall Target be liable for any consequential, indirect or other damages whether arising from negligence or otherwise.

TARGET is a registered trade-mark of Tegrat Holdings Ltd. Target Products Ltd. is an authorized licensee.



T  
A  
R  
G  
E  
T  
  
P  
R  
O  
D  
U  
C  
T  
S  
  
L  
T  
D

# GLASS BLOCK MORTAR MIX (WHITE)

October, 04 Page 2 of 1

8 inch glass block	100 ft <sup>2</sup>	6 1/2 bags
12 inch glass block	100 ft <sup>2</sup>	4 1/2 bags

T  
A  
R  
G  
E  
T  
  
P  
R  
O  
D  
U  
C  
T  
S  
  
L  
T  
D

Product performance is affected by many factors, including storage, method and conditions of application and use. User testing is ESSENTIAL to determine suitability of product for intended method of application and use. Target's SOLE WARRANTY is that the product has been manufactured to specifications. No oral or written information or advice shall increase this warranty or create new warranties. Target's SOLE LIABILITY is to replace product proved defective. In no event shall Target be liable for any consequential, indirect or other damages whether arising from negligence or otherwise.



TARGET is a registered trade-mark of Tegrat Holdings Ltd. Target Products Ltd. is an authorized licensee.